UCFLX 2-Bolt Flange Units

B-type Seal

L3 type Seal

Medium duty with set screw lock.

- Wide inner race with greater load carrying capacity than standard duty
- Cast iron housing
- B-type seals
  L3-type seals available in some sizes

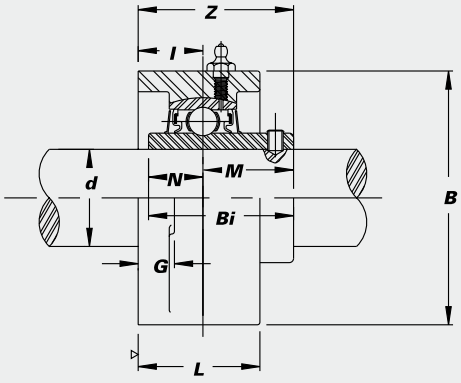

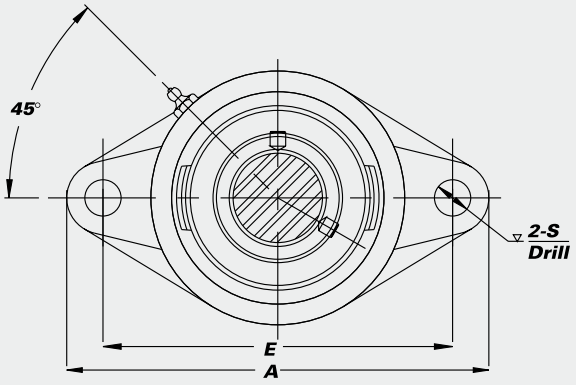

Unit No.	Shaft Dia. d (in.)	Shaft Dia. d (mm)	A	E	I	G	L	S	B	Z	Bi	N	M	Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
UCFL X05-14 X05-15 X05 X05-16	7/8 15/16 1	25	5 13/16 148	4 19/32 116.7	45/64 18	1/2 13	1 7/32 31	15/32 11.9	3 5/32 80	1 19/32 40.5	1.5000 38.1	0.6260 15.9	0.8740 22.2	3/8	UCX05-14 X05-15 X05 X05-16	FL 206	2.4
UCFL X06-18 X06 X06-19 X06-20	1 1/8 1 3/16 1 1/4	30	6 11/32 161	5 1/8 130.2	3/4 19	9/16 14	1 11/32 34	33/64 13	3 17/32 90	1 3/4 44.5	1.6890 42.9	0.6890 17.5	1.0000 25.4	7/16	UCX06-18 X06 X06-19 207-20	FL 207	3.3
UCFL X07-22 X07 X07-23	1 3/8 1 7/16	35	6 7/8 175	5 21/32 143.7	53/64 21	9/16 14	1 13/32 36	33/64 13	3 15/16 100	2 50.8	1.9370 49.2	0.7480 19.0	1.1890 30.2	7/16	UCX07-22 X07 X07-23	FL 208	4.2
UCFL X08-24 X08	1 1/2	40	7 13/32 188	5 27/32 148.4	55/64 22	19/32 15	1 1/2 38	19/32 15	4 1/4 108	2 1/16 52.4	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	UCX08-24 X08	FL 209	4.6
UCFL X09-26 X09-27 X09-28 X09	1 5/8 1 11/16 1 3/4 	45	7 3/4 197	6 3/16 157	55/64 22	19/32 15	1 9/16 40	5/8 16	4 17/32 115	2 5/32 54.8	2.0315 51.6	0.7480 19.0	1.2835 32.6	1/2	UCX09-26 X09-27 X09-28 X09	FL 210	5.3
UCFL X10-30 X10-31 X10 X10-32	1 7/8 1 15/16 2	50	8 13/16 224	7 1/4 184	63/64 25	23/32 18	1 11/16 43	41/64 16.3	5 1/8 130	2 5/16 58.7	2.1890 55.6	0.8740 22.2	1.3150 33.4	9/16	UCX10-30 X10-31 X10 211-32	FL 211	8.4
UCFL X11-34 X11 X11-35 X11-36	2 1/8 2 3/16 2 1/4	55	9 27/32 250	7 15/16 201.6	1 9/64 29	23/32 18	1 7/8 48	41/64 16.3	5 1/2 140	2 23/32 69.1	2.5630 65.1	1.0000 25.4	1.5630 39.7	9/16	UCX11-34 X11 X11-35 212-36	FL 212	9.9

Interchange Page 91